



USA



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

3 March 2004



1994



7/77

**Statement of inventorship and of  
right to grant of a patent**

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

DY3135

2. Patent application number  
(if you know it)

0310643.2

- 9 MAY 2003

3. Full name of the or of each applicant

ROLLS-ROYCE PLC

4. Title of the invention

PUMP CONTROL SYSTEM

5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent

BY VIRTUE OF SECTION 39(1)(a) OF THE PATENTS ACT 1977.

6. How many, if any, additional Patents Forms  
7/77 are attached to this form?  
(see note (c))

1

7.

I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature

Date

M A GUNN

8.5.2003

8. Name and daytime telephone number of  
person to contact in the United Kingdom

M A GUNN

01332 249457

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

DAVID MICHAEL GAINFORD  
57 BRAEMAR ROAD  
SUTTON COLDFIELD  
WEST MIDLANDS  
B73 6LZ



Patents ADP number (if you know it): 8627903001

Patents ADP number (if you know it):

**Reminder**

Have you signed the form?

Patents ADP number (if you know it):

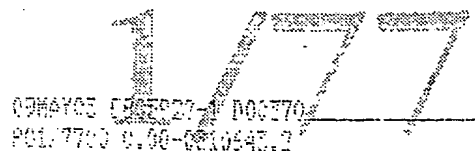

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

DY3135

2. Patent application number

(The Patent Office will fill in this part)

0310643.2

- 9 MAY 2003

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

ROLLS-ROYCE PLC  
65 BUCKINGHAM GATE  
LONDON  
SW1E 6AT

Patents ADP number (*if you know it*)

3970002

If the applicant is a corporate body, give the country/state of its incorporation

ENGLAND

4. Title of the invention

PUMP CONTROL SYSTEM

5. Name of your agent (*if you have one*)

M A GUNN

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

ROLLS-ROYCE plc  
PATENTS DEPARTMENT  
PO BOX 31  
DERBY  
DE24 8BJ

Patents ADP number (*if you know it*)

3962001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s) 7

Abstract 1

Drawing(s) 2

12

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 2

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents (please specify)

DEPOSIT ACCOUNT FEE SHEET

11.

I/We request the grant of a patent on the basis of this application.

Signature

M A GUNN

Date

8.5.2003

12. Name and daytime telephone number of person to contact in the United Kingdom

M A GUNN

01332 249457

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Pump Control System

This invention relates to pump control systems. More particularly, but not specifically, the invention relates to  
5 fuel pump control systems, for example in engines such as gas turbine engines.

In general engines require fuel to be pumped to one or more combustion chambers under controlled conditions, depending on the requirements of the engine. Any variation  
10 in the pressure or rate of flow of the fuel for a particular engine requirement can result in combustion instability and physical deterioration of system and engine components. Such instability can result in significant problems in the engines.

15 According to one aspect of this invention there is provided a pump control system comprising demand means for providing a demand signal relating to pump speed, a required rate of fluid flow and/or pressure from a pump, and compensation means to modify the signal to render the signal  
20 suitable to affect functioning of the pump.

Preferably, the control system comprises sensing means to sense pump speed, or at least one parameter of fluid downstream of the pump. The sensing means may provide at least one feedback signal relating to the, or each,  
25 respective parameter. The system desirably comprises comparator means for comparing the demand signal with the, or at least one, feedback signal to provide a control signal to control the pump.

In the preferred embodiment, the compensation means  
30 modifies the demand signal so that, in combination with the transfer function of the pump a desired output is provided from the pump.

As used herein the expression "transfer function" is intended to refer to the relationship between the behaviour of the output of a feature and the behaviour of the input of the feature.

5 As used herein, the expression "compensate" is intended to refer to a modification process, which could include a conversion from one physical medium to another, for example a conversion from electrical current to torque, or a conversion from position to volts.

10 According to another aspect of this invention, there is provided a pump control system comprising demand means for providing a demand signal relating to a required pump speed, rate of fluid flow and/or pressure from a pump; sensing means to sense pump speed or at least one parameter of fluid  
15 downstream of the pump and to provide at least one feedback signal relating to the, or each, respective parameter; and comparator means for comparing the demand signal with the, or at least one, feedback signal to provide a control signal to control the pump.

20 Preferably, the control signal is determined by the demand signal and the, or at least one, feedback signal. The sensing means may comprise a plurality of sensors, each sensing a respective parameter of pump and/or the fluid, and/or where the system is used in an engine, each sensing a  
25 respective parameter of the engine. Preferably the comparator means comprises a primary comparator for comparing a first feedback signal with the demand signal and providing a primary control signal. The comparator means may further include a secondary comparator for comparing one or more  
30 secondary feedback signals with the primary control signal to provide a secondary control signal.



The primary comparator may provide a primary control signal for controlling the pump. In one embodiment, the primary comparator may subtract the first feedback signal from the demand signal to provide said primary control  
5 signal.

Conveniently, the sensing means comprises a sensor arrangement to sense either pump speed, fluid pressure, and/or the rate of flow of pumped fluid downstream of the pump. Preferably, the sensor arrangement provides first and  
10 second feedback signals relating to pump speed, fluid pressure, or to the rate of flow of the fluid.

The sensor arrangement may comprise a first feedback signal compensation means to provide compensation to the first feedback signal to modify the first feedback signal and  
15 render the first feedback signal into a form whereby it can be supplied to the first comparator. A further compensation means may modify one or more further feedback signals for use by a second comparator.

Preferably, the demand signal provided by the demand  
20 means relates to the required rate of fluid flow, the required pump speed, or the required fluid pressure.

The sensing means may comprise a speed sensor to sense the speed of the pump. Preferably, the speed sensor provides a feedback signal relating to the speed of the pump.

25 Alternatively, or in addition, the sensing means may comprise a pressure sensor and/or a flow sensor to sense the conditions of pumped fluid downstream of the pump. Preferably, the pressure and/or the flow sensor provides one or more feedback signals relating respectively to the  
30 pressure and/or flow of the fluid.

The sensing means may comprise feedback compensation means to provide compensation to the, or each, feedback

signal to modify the, or each, feedback signal and render it into a form whereby it can be supplied to the comparator means.

Preferably, the fluid to be pumped is a fuel, to be  
5 combusted in a combustion chamber and produce combustion gases. The sensing means may comprise at least one combustion gas sensor to sense conditions of the combusted gases in, or downstream of, the combustion chamber. Preferably, the combustion gas sensor provides a combustion  
10 gas feedback signal relating to a parameter of the combustion gases.

The control system may comprise combustion gas feedback compensation means to provide compensation to the combustion gas feedback signal to modify the combustion gas feedback  
15 signal and render it into a form whereby it can be supplied to the comparator means.

The secondary comparator may compare the primary control signal with one or both of the modified secondary pump feedback signal and the modified combustion gas feedback  
20 signal. Preferably, the secondary comparator provides a secondary control signal for controlling the pump. In one embodiment, the secondary comparator may subtract from the primary control signal one or both of the modified pressure feedback signal and the modified combustion gas feedback  
25 signal. In another embodiment, the secondary comparator may comprise a plurality of comparators, one of which is operable on a combustion gas feedback signal, and the, or each, other of which is operable on the secondary pump feedback signal.

The control system may include configurations where one  
30 or more of the feedback signals described above is not incorporated.

According to another aspect of this invention there is provided a pump arrangement, comprising a pump to pump a fluid, and a pump control system as described above.

Desirably, the pump is configured to provide a  
5 characteristic speed, pressure and/or rate of flow when provided within an input control signal. Preferably, variations in the control signal cause concomitant variations in the speed, pressure and/or rate of fluid flow pumped from the pump.

10 An embodiment of the invention will now be described by way of example only, with reference to the accompanying drawing, in which:

Fig. 1 is a cross-sectional side view of the upper half of a gas turbine engine; and

15 Fig. 2 is a schematic diagram of a control system for a pump.

Referring to Fig. 1, a gas turbine engine is generally indicated at 10 and comprises, in axial flow series, an air intake 11, a propulsive fan 12, an intermediate pressure  
20 compressor 13, a high pressure compressor 14, a combustor 15 a turbine arrangement comprising a high pressure turbine 16, an intermediate pressure turbine 17 and a low pressure turbine 18, and an exhaust nozzle 19.

The gas turbine engine 10 operates in a conventional  
25 manner so that air entering the intake 11 is accelerated by the fan 12 which produces two air flows: a first air flow into the intermediate pressure compressor 13 and a second air flow which provides propulsive thrust. The intermediate pressure compressor compresses the air flow directed into it  
30 before delivering that air to the high pressure compressor 14 where further compression take place.

The compressed air exhausted from the high pressure compressor 14 is directed into the combustor 15 where it is mixed with fuel and the mixture combusted. The resultant hot combustion products then expand through and thereby drive the high, intermediate and low pressure turbines 16, 17 and 18, before being exhausted through the nozzle 19 to provide additional propulsive thrust. The high, intermediate and low pressure turbines 16, 17 and 18 respectively drive the high and intermediate pressure compressors 14 and 13 and the fan 12 by suitable interconnecting shafts.

In order to control the flow of fuel to the combustor 15 a pump is provided. A pump control system 20 is shown diagrammatically in Fig. 2.

Referring to Fig. 2, the control system 20 for a pump 21 is shown which comprises demand means 22 for providing a demand signal 23, relating to a required speed for the pump 21. Fuel from the pump may flow through a fuel metering system 24 to the combustor 15. The demand means could be suitable electronic or mechanical devices connected to the control lever for the gas turbine engine 10 which is designed to produce predetermined signals on variation of the control lever.

In this example, a sensor arrangement 26 is provided on the pump 21 to detect the speed of the pump 21.

The sensor arrangement 26 provides a pump speed feedback signal 28 to a primary comparator 30. The feedback path for the sensor arrangement 26 comprises a first feedback compensation means 32 to modify the first feedback signal 28 as appropriate. The modified first feedback signal 29 is received by the primary comparator 30.

The primary comparator 30 compares the demand signal 23 with the modified first feedback signal 29 and provides a primary control signal 33.

5 A primary control compensation means 34 is applied to the primary control signal 33 to modify the primary control signal 33. The modified primary control signal is received by a secondary comparator 36.

10 In this example, the control system 20 also includes a pressure sensor 38 downstream of the pump 21 to sense the pressure of fuel pumped from the pump 21, and provides a pressure feedback signal 40. The pressure sensor 38 comprises a pressure compensation means 42 to provide compensation to the pressure feedback signal 40. The compensated pressure feedback signal 43 is received by the  
15 secondary comparator 36.

In this example, a combustion gas sensor 44 is provided downstream of, or in, the combustor 15 to sense conditions of the gases emerging from the combustor 15 and provides a combustion gas feedback signal 46. The combustion gas sensor  
20 44 comprises a combustion gas compensation means 48 to provide compensation to the combustion gas feedback signal 46. The compensated combustion gas feedback signal 49 is received by the secondary comparator 36.

The secondary comparator 36 compares the signals  
25 received thereby and provides a secondary control signal 50 for controlling the pump 21. A secondary control signal compensation means 52 provides compensation to the secondary control signal 50 so that it can be utilised by the pump 21.

30 An example of the operation of the control system will now be discussed. The demand means 22 provides a demand signal 23 for a desired fuel pump speed. The demand signal 23 is transmitted to the pump 21 which delivers an amount of

fuel according to its speed. If the speed sensor 26 indicates that the speed of the pump 21 is greater than demanded by the demand means 22, a speed feedback signal 28 to that effect is provided thereby and after the compensation 5 by the compensation means 32, a compensated feedback signal 29 is received by the primary comparator 30. A comparison of the demand signal 23 and the compensated speed feedback signal 29 causes the primary comparator 30 to provide a primary control signal 33 which requires the pump 21 to 10 reduce speed, with a resultant effect on the fuel being supplied. The compensator 34, in this embodiment, includes an integral term to allow the system to settle in steady state conditions.

In addition, a pressure feedback signal 40 is provided 15 by the pressure sensor 38 and in this embodiment, the pressure compensation means 42 provides a modified pressure feedback signal 43 related to the rate of change of pressure. The modified pressure feedback signal 43 is fed to the secondary comparator 36. The secondary comparator 36 20 combines the compensated primary control signal 37 with the modified pressure feedback signal 43 and provides a secondary control signal 50 adjusted accordingly. Similarly, a combustion gas feedback signal 46 is provided by the combustion gas sensor 44, and in the embodiment shown, the 25 compensation means 48 provides a modified combustor feedback signal 49 relating to the rate of change of combustor conditions. The modified combustor signal 49 is fed to the secondary comparator 36. The secondary comparator 36 combines the modified pressure feedback signal 43 with the 30 modified primary control signal 37, and with the pressure feedback signal 43, if available, and provides a further

modification to the secondary control signal 50 for the pump 21 to modulate the flow of fuel pumped thereby.

As can be seen, by continually monitoring the various parameters of the fuel pumped by the pump 21 and the gases  
5 produced by the combustor 15, the desired level of fuel pumped by the pump 21 is obtained, whilst achieving a much lower level of variation in pressure conditions at the pump and/or in the combustion system.

Various modifications can be made without departing from  
10 the scope of the invention. For example, in a basic system, the pressure sensor 38 and/or the combustion gas sensor 44 could be omitted. The remaining compensation means can then be designed to modify known characteristics of the fuel system, including the pump. Also, the invention may be  
15 embodied in any available technology, including combinations of mechanical, electrical, electronic, software, pneumatic and hydraulic technologies. It will be appreciated, therefore, that use of the word "signal" in this specification is not limited to communication by electrical  
20 or electronic means.

An example of a system described in the preceding paragraph could be an electric motor driving a fuel pump, which exhibits pulses if a constant electrical torque is applied to the motor. In such a case compensation could be  
25 achieved by the use of a mechanical cam arrangement or through appropriate configuration of the motor windings.

Whilst endeavouring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the  
30 Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to

and/or shown in the drawings whether or not particular emphasis has been placed thereon.



**Claims:-**

1. A pump control system comprising demand means for providing a demand signal relating to a required pump speed,  
5 rate of fluid flow and/or pressure from a pump, and compensation means to modify the signal to render the signal suitable to affect functioning of the pump.
2. A pump control system according to claim 1, wherein the system comprises sensing means to sense at least one  
10 parameter of fluid downstream of the pump, the sensing means providing at least one feedback signal relating to the, or each, respective parameter.
3. A pump control system according to claim 2, wherein the system comprises comparator means for comparing the demand  
15 signal with the, or at least one, feedback signal to provide a control signal to control the pump.
4. A pump control system according to claim 1, 2 or 3, wherein the pump has a transfer function, and the compensation means modifies the demand signal in accordance  
20 with the transfer function so that the pump provides a desired output.
5. A pump control system comprising demand means for providing a demand signal relating to pump speed, a required rate of fluid flow and/or pressure from a pump; sensing means  
25 to sense at least one parameter of fluid downstream of the pump and to provide at least one feedback signal relating to the, or each, respective parameter; and comparator means for comparing the demand signal with the, or at least one, feedback signal to provide a control signal to control the  
30 pump.

6. A pump control system according to claim 5, wherein the control signal is determined by the demand signal and the, or at least one, feedback signal.
7. A pump control system according to claim 5 or 6, wherein  
5 the sensing means comprises a plurality of sensors, each sensing a respective parameter of the fluid, and/or where the system is used in an engine, each sensing a respective parameter of the engine.
8. A pump control system according claim 5, 6 or 7, wherein  
10 the comparator means comprises a primary comparator for comparing a first feedback signal with the demand signal and providing a primary control signal, the comparator means further including a secondary comparator for comparing at least one second feedback signal with the primary control  
15 signal to provide a secondary control signal.
9. A pump control system according to claim 8, wherein the secondary comparator compares at least one further feedback signal with the primary control signal and the secondary feedback signal to provide said secondary control signal.
- 20 10. A pump control system according to claim 8 or 9, wherein the sensing means comprises a sensor arrangement to sense pump speed, fluid pressure, and/or the rate of flow of pumped fluid downstream of the pump, the sensor arrangement providing a first feedback signal relating to pump speed or  
25 to the pressure or rate of flow of the fluid.
11. A pump control system according to claim 10, wherein the sensor arrangement comprises a first feedback signal compensation means to render the first feedback signal into a form whereby it can be used by the comparator means.
- 30 12. A pump control system according to any of claims 8 to 11, wherein the demand signal provided by the demand means

relates to the required rate of fluid flow, the required pump speed or to the required fluid pressure.

13. A pump control system according to claim 8 or 9, wherein the comparator means comprises a primary comparator to  
5 compare the first feedback signal with the demand signal, the primary comparator providing a primary control signal for controlling the pump.

14. A pump control system according to claim 13, wherein the primary comparator subtracts the first feedback signal from  
10 the demand signal to provide said primary control signal.

15. A pump control system according to any of claims 8 to 14, wherein the sensing means comprises a pressure sensor to sense the pressure of pumped fluid downstream of the pump, the pressure sensor providing a pressure feedback signal  
15 relating to the pressure of the fluid.

16. A pump control system according to claim 15, wherein the pressure sensor comprises a pressure feedback compensation means to provide compensation to the pressure feedback signal to modify the pressure feedback signal and render it into a  
20 form whereby it can be used by the comparator.

17. A pump control system according to any of claims 8 to 16, wherein the fluid to be pumped is a fuel, to be combusted in a combustion chamber and produce combustion gases, and the sensing means comprises at least one combustion gas sensor to  
25 sense conditions of the combusted gases in, or downstream of, the combustion chamber, the combustion gas sensor providing a combustion gas feedback signal relating to a parameter of the combustion gases.

18. A pump control system according to claim 17, wherein the  
30 control system comprises combustion gas feedback compensation means to provide compensation to the combustion gas feedback signal to modify the combustion gas feedback signal and

render it into a form whereby it can be used by the comparator.

19. A pump control system according to claim 16 or 18, wherein the secondary comparator compares the primary control  
5 signal with one or both of the modified pump feedback signal and the modified combustion gas feedback signal, the secondary comparator providing a secondary control signal for controlling the pump.

20. A pump control system according to claim 19, wherein the  
10 secondary comparator subtracts from the primary control signal one or both of the modified pump feedback signal and the modified combustion gas feedback signal.

21. A pump arrangement, comprising a pump to pump a fluid, and a pump control system according to any preceding claim.

15 22. A pump arrangement according to claim 21, wherein the pump is configured to provide a characteristic speed, pressure and/or rate of flow when provided within an input control signal, variations in the control signal cause concomitant variations in the speed, pressure and/or rate of  
20 fluid flow pumped from the pump.

23. A method of controlling a pump control system comprising providing a demand signal relating to a required speed, pressure, or rate of fluid flow and/or pressure from the pump, and modifying the signal to render the signal suitable  
25 to affect functioning of the pump.

24. A method according to claim 23 comprising sensing at least one parameter of fluid downstream of the pump and providing at least one feedback signal relating to the, or each, respective parameter.

30 25. A method according to claim 23 or 24 comprising comparing the demand signal with the, or at least one,

feedback signal to provide a control signal to control the pump.

26. A method according to claim 23, 24 or 25, wherein the pump has a transfer function, and the method involves  
5 modifying the demand signal in accordance with the transfer function of the pump to provide a desired output from the pump.

27. A method of controlling a pump providing a demand signal relating to a required speed, pressure or rate of fluid flow  
10 and/or pressure from a pump; sensing pump speed or at least one parameter of fluid downstream of the pump and providing at least one feedback signal relating to the, or each, respective parameter; and comparing the demand signal with the, or at least one, feedback signal to provide a control  
15 signal to control the pump.

28. A method according to claim 27, wherein the control signal is determined by the demand signal and the, or at least one, feedback signal.

29. A method according to claim 27 or 28 comprising sensing  
20 pump speed and/or a plurality of parameters of the fluid, and/or where the system is used in an engine, sensing a plurality of parameters of the engine.

30. A method according to claim 27, 28 or 29 comprising comparing a first feedback signal with the demand signal and  
25 providing a primary control signal, and comparing a second feedback signal with the primary control signal to provide a secondary control signal.

31. A method according to claim 30 comprising comparing at least one further feedback signal with the primary control  
30 signal and the secondary feedback signal to provide said secondary control signal.

32. A method according to claim 30 or 31 comprising sensing either pump speed, fluid pressure, and/or the rate of flow of pumped fluid downstream of the pump, and providing a first feedback signal relating to pump speed or to the fluid  
5 pressure or the rate of flow of the fluid.

33. A method according to claim 32 comprising modifying the first feedback signal in accordance with the transfer function of the pump to render the first feedback signal into a form whereby the pump provides a desired output.

10 34. A method according to any of claims 30 to 33, wherein the demand signal relates to the required rate of fluid flow, or to the required pump speed.

35. A method according to claim 30 or 31 comprising comparing the first feedback signal with the demand signal,  
15 and providing a primary control signal for controlling the pump.

36. A method according to claim 31 comprising subtracting the first feedback signal from the demand signal to provide said primary control signal.

20 37. A method according to any of claims 30 to 36 comprising sensing the pressure of pumped fluid downstream of the pump, and providing a pressure feedback signal relating to the pressure of the fluid.

38. A method according to claim 37 comprising modifying the  
25 pressure feedback signal to render it into a form whereby the transfer function of the pump provides a desired output.

39. A method according to any of claims 30 to 38, wherein the fluid to be pumped is a fuel, to be combusted in a combustion chamber and produce combustion gases, and the  
30 method includes the sensing conditions of the combusted gases in, or downstream of, the combustion chamber, and providing a

combustion gas feedback signal relating to a parameter of the combustion gases.

40. A method according to claim 39 comprising modifying the combustion gas feedback signal to render it into a form  
5 whereby the transfer function of the pump provides a desired output.

41. A method according to claim 38 or 40 comparing the primary control signal with one or both of the modified pump feedback signal and the modified combustion gas feedback  
10 signal, and providing a secondary control signal for controlling the pump.

42. A method according to claim 41 comprising subtracting from the primary control signal one or both of the modified pump feedback signal and the modified combustion gas feedback  
15 signal to provide the secondary control signal.

43. A combustor arrangement comprising a combustor and a pump arrangement according to claim 21 or 22.

44. A gas turbine engine incorporating a combustor arrangement according to claim 43.

20 45. A control system for a pump substantially as herein described with reference to Fig. 2.

46. A method of controlling a pump substantially as herein described with reference to Fig. 2.

25 47. Any novel subject matter or combination including novel subject matter disclosed herein, whether or not within the scope of or relating to the same invention as any of the preceding claims.

AbstractPump Control System (Fig. 2)

5        A pump control system (20) for a pump (21) in a gas turbine engine (10) is described. The pump control system (20) comprises demand means (22) for providing a demand signal (23) relating to a required rate of fluid flow and/or pressure from the pump (21). The system also comprises  
10    sensing means (26) to sense at least one parameter of fluid downstream of the pump (21) and to provide at least one feedback signal (28) relating to the, or each, respective parameter. Comparator means (30) is provided for comparing the demand signal (23) with the, or at least one, feedback  
15    signal to provide a control signal (33) for controlling the pump.



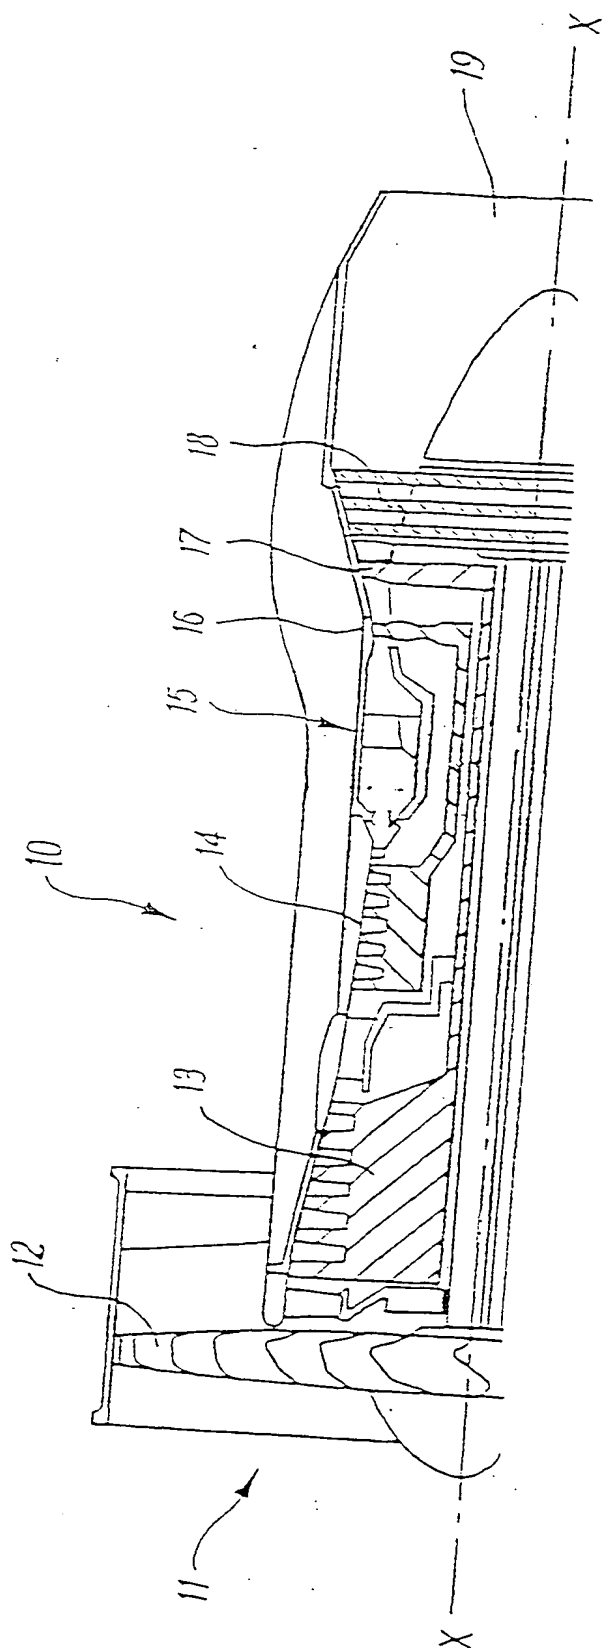


FIG. 1

THIS PAGE BLANK (USPTO)

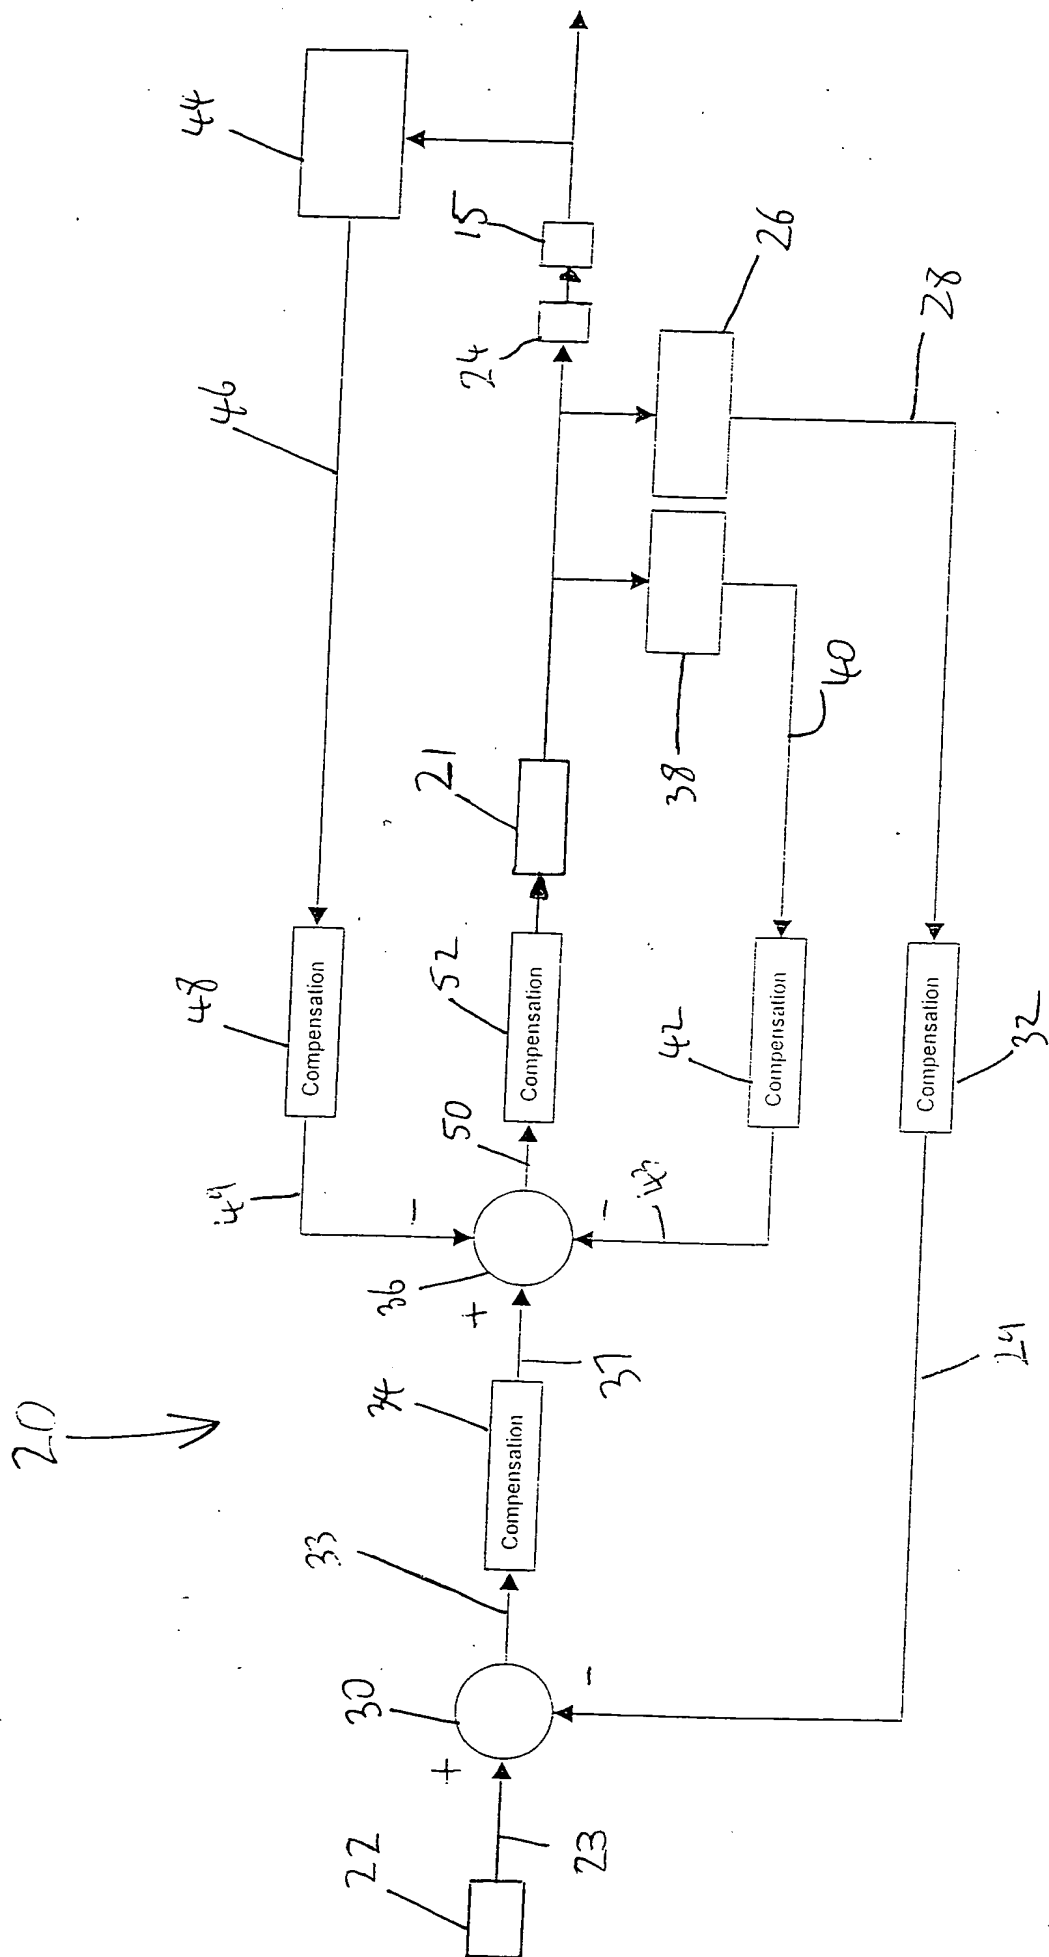


Fig 2-

**THIS PAGE BLANK (USPTO)**